

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

10400

05-25-01

In re PATENT APPLICATION of
Inventor(s): LONGONI et al.



#3

Appln. No.: 09 | 847,580
Series ↑ | ↑ Serial No.
Code

Group Art Unit: Not Yet Assigned

Filed: May 3, 2001

Examiner: Not Yet Assigned

Title: FRAME SYNCHRONIZATION MECHANISM

Atty. Dkt. P 280280 | 2990435US/VK/KP
M# Client Ref

Date: May 25, 2001

**SUBMISSION OF PRIORITY
DOCUMENT IN ACCORDANCE
WITH THE REQUIREMENTS OF RULE 55**

Hon. Asst Commissioner of Patents
Washington, D.C. 20231

Sir:

Please accept the enclosed certified copy(ies) of the respective foreign application(s) listed below for which benefit under 35 U.S.C. 119/365 has been previously claimed in the subject application and if not is hereby claimed.

<u>Application No.</u>	<u>Country of Origin</u>	<u>Filed</u>
982399	FINLAND	November 5, 1998
990499	FINLAND	March 8, 1999
991184	FINLAND	May 25, 1999

Respectfully submitted,

Pillsbury Winthrop LLP
Intellectual Property Group

1100 New York Avenue, NW
Ninth Floor
Washington, DC 20005-3918
Tel: (202) 861-3000
Atty/Sec: CHM/JRH

By Atty: Christine H. McCarthy Reg. No. 41844
Sig: [Signature] Fax: (202) 822-0944
Tel: (202) 861-3075

PATENTTI- JA REKISTERIHALLITUS
NATIONAL BOARD OF PATENTS AND REGISTRATION

Helsinki 4.5.2001



ETUOIKEUSTODISTUS
PRIORITY DOCUMENT

Hakija
Applicant

Nokia Telecommunications Oy
Helsinki



Patenttihakemus nro
Patent application no

982399

Tekemispäivä
Filing date

05.11.1998

Kansainvälinen luokka
International class

H04L

Keksinnön nimitys
Title of invention

"Frame synchronisation mechanism"
(Kehyssykrontimekanismi)

Hakijan nimi on hakemusdiaariin 05.12.1999 tehdyn nimenmuutoksen jälkeen **Nokia Networks Oy**.

The application has according to an entry made in the register of patent applications on 05.12.1999 with the name changed into **Nokia Networks Oy**.

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

Marketta Tehikoski
Apulaistarkastaja

Maksu 300,- mk
Fee 300,- FIM

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328
FIN-00101 Helsinki, FINLAND

Frame synchronisation mechanism

Background of the invention

The invention relates to methods and equipment for synchronisation of frames which are transmitted over multiple parallel transmission paths in a telecommunications network.

Fig. 1A illustrates a telecommunications network in which the invention is applicable. The telecommunications network could be e.g. a so-called third generation cellular mobile network, such as UMTS (Universal Mobile Telecommunications System). The telecommunications network comprises a first end node, such as a mobile station MS, and a second end node, such as a Radio Network Controller RNC1, RNC2. The network also comprises several middle nodes, such as Base Stations BS1 to BS4. Information to be sent between the end nodes is formatted as frames and at least some frames are sent between the end nodes via at least two middle nodes. The first middle node via which a connection between the end nodes is established is called a first middle node. The other middle nodes, which are added later to the connection, are called second middle nodes. In cellular network technology, the technique of routing frames via several middle nodes is called macrodiversity, diversity combining or soft handover.

Fig. 1B illustrates a problem associated with the system as shown in Fig. 1A. From this point on, the invention will be described using concepts and terminology from cellular networks, especially UMTS, but it should be kept in mind that the invention is applicable to other telecommunications networks where the middle nodes (the base stations) are not synchronised with each other and/or the end nodes (MS, RNC). In other words, the different nodes do not use a common timing reference and/or frame numbering sequence. However, recent UMTS literature favours the term User Equipment (UE), but in this application, the term Mobile Station (MS) will be used.

According to the current vision of UMTS, some traffic overhead is eliminated by not transmitting frame numbers with the frames (i.e. on a traffic channel) over the radio interface Uu. Instead, in the BS to MS direction, the frame numbers are broadcast to all mobile stations simultaneously, and in the BS to RNC direction, the base stations add the frame numbers in a modulo-p sequence where the currently proposed value for p is 72. In other words, the frame numbers repeat cyclically: 0, 1, ..., 71, 0, 1, etc. The base stations are not synchronised with each other. Therefore, the frame numbers are relative

and, indeed as such, they are meaningless without at least an implicit information about the timing reference to which the frame numbers are based. Depending on the point of view, the frame numbers are called MSFN, BS1FN, BS2FN, etc. In Fig. 1B, time advances from top to bottom. At time T_0 , the Mobile Station MS receives a frame which the MS interprets as frame number N. Because the mobile station's timing reference, i.e. its clock, is the master timing reference, the RNC must have sent this frame sometime before T_0 . This "sometime" is called Timing Difference T_{diff} and it is due to the finite propagation and processing delays between the RNC and the MS. (The concept of the transmission delay is somewhat analogous to the timing advance in a GSM system, but in GSM, the timing advance of the MS is adjusted.)

At time T_0 , the MS also sends an uplink frame to the RNC. This uplink frame is also numbered N because the frame numbering is based on the mobile station's timing reference. Under each node (MS, BS1, BS2) is shown the corresponding timing reference, or frame numbering sequence (MSFN, BS1FN, BS2FN). Approximately at time $T_0 + T_{diff}$, the RNC receives the frame N via two base stations, BS1 and BS2. Because the frame number is not transmitted over the radio interface, and because the base stations use different timing references, BS1 sends this frame to the RNC as frame N', whereas BS2 would send the same frame as frame N". The RNC does not have an intrinsic timing reference.

Although the first problem is most severe in a system using macrodiversity, the underlying problem of BS/RNC synchronisation also occurs without macrodiversity.

A second problem is that in some telecommunications systems, such as UMTS, the connection can be reconfigured, e.g. for negotiating a different data rate. Such reconfiguration must take place simultaneously at all nodes involved in the connection.

A third problem is that in systems using encryption, the frame number is often used as a constantly varying cipher key. However, a modulo-72 frame number is too short for reliable ciphering.

Disclosure of the invention

An intermediate object of the invention is to provide a mechanism for solving at least the first problem above, i.e. MS/BS/RNC synchronisation. A final object is to solve also the other two problems relating to simultaneous reconfiguration and ciphering.

The intermediate object is achieved with a method and the equipment which are characterized by what is disclosed in the attached independent claims. Preferred embodiments for solving the other two problems are disclosed in the attached dependent claims.

5 The invention is based on locating a novel problem (in existing macrodiversity implementations, the base stations are synchronised and the problem does not exist). The invention is also based on an idea which can be implemented as a method comprising the steps of: (1) establishing a connection-specific timing reference (called CFN) which is common to all nodes involved in the connection; (2) determining, for at least one base station, an offset which is related to the difference between the timing reference of the base station in question and the CFN; and (3) using the information about the offset to compensate for the difference between the timing references.

10 According to the invention, it is proposed that the Mobile Station MS and the Serving Radio Network Controller SRNC must agree on a common timing reference which comprises at least a common frame numbering scheme. Within the context of this application, 'common' means common to the connection between the MS, the SRNC and the intervening base station(s). Such a common frame numbering scheme is called Connection Frame Number CFN.

20 According to a preferred embodiment of the invention, the offset is used by the at least one base station, for synchronising its timing reference to that of the RNC.

25 Using the common frame numbering scheme, i.e. the CFN, means that when the SRNC decides to send data to a Mobile Station MS, it marks the frame with a frame number of X. When the Mobile Station receives the frame, it identifies the frame as frame X. However, the actual frame number is not transmitted on the traffic channel, and correspondingly, the common frame numbering scheme must be agreed on while establishing a connection. In other words, the MS and the SRNC must synchronise their frame numbering schemes at the beginning of the MS activity. In other words, MS and the SRNC must synchronise with each other during the exchange of the first few messages of the connection. The MS/RNC synchronisation can be based on a separate synchronisation message, if desired, but a separate message for this purpose is superfluous if the following mechanism is used: The first message which the MS sends is typically a CONNECTION REQUEST message. It comprises

the measurement of the cells which the MS proposes to include in its active set, i.e. its set of active cells/base stations. According to the invention, the initial message also comprises information concerning the difference between the timing references of the various base stations. The difference between the MS's timing reference and that of base station number n will be called OFS_n . It is measured for each base station monitored by the MS.

The SRNC determines the common reference from the point of time when it receives the initial CONNECTION REQUEST from the MS. When the SRNC orders the base station(s) to establish dedicated channels for the MS, the SRNC also sends to the base station the corresponding BS-specific offset OFS_n . In every downlink frame, the SRNC includes a frame number according to the common frame numbering scheme. For each frame, this number is the same for all base stations. For transmission over the radio interface, each base station uses its own base station-specific offset OFS_n to map the common frame number to the base station's own numbering scheme. After this frame number mapping, the BS can send the frame at the correct point of time. The base stations also perform reverse mapping in the uplink direction, whereby the diversity combining unit in the SRNC is able to combine frames having a common frame number.

The common frame number is also the timing reference used for RRC (Radio Resource Control protocol) messages, e.g. handover commands from the SRNC to the MS.

According to one embodiment of the invention, one base station, preferably the first one involved in the connection, does not have to compensate for the difference between the timing references. In other words, the other base stations' timing reference is offset to match that of the first base station.

According to a preferred embodiment of the invention, the frame number FN comprises two parts. One part, forming the least significant bits of the FN, is the known modulo-72 CFN. The other part, forming the most significant bits of the FN, can be called a Hyper Frame Number, HFN. Preferably, the combined length of the FN ($= CFN + HFN$) is at least 32 bits. This embodiment solves the third problem relating to encryption.

When the MS sends its initial CONNECTION REQUEST message, it can set the HFN to zero and the CFN to the BS1FN of the RACH frame in which the message was successfully sent. The SRNC receives the message in a FCL (Frame Control Layer) frame containing also the BS1FN ($= CFN$), and it can

initialise the MSFN to a correct value. The MSFN (for that specific MS) stored in the SRNC is incremented every 10 ms, even if no uplink frames are received. In practice, however, it is sufficient to increment only the HFN every 720 ms, because the CFN is included in every uplink FCL frame. It is possible
 5 to eliminate a MS-specific HFN counter by 1) storing only an initial value for each MS, and 2) for each frame, adding to the initial value the number of completed CFN periods (at 720 ms each) from the establishment of the connection, i.e. from the time when the HFN was initialised.

Since the MS's timing reference is the master, the MS is at liberty to
 10 choose any value for the initial value of the CFN and/or the HFN. Such a degree of freedom can be used to improve the ciphering security. Instead of rigidly setting the CFN and/or the HFN on the basis of the time of the CONNECTION REQUEST message, this point of time could be used as a seed number to a secret algorithm, for providing an initial value for ciphering such that the
 15 initial value is unobtainable to an eavesdropper.

According to yet another preferred embodiment of the invention, the frame number offsets OFSn are not integer numbers but have a higher resolution. The fractional part of the OFS is called a Symbol Offset, SOF, and its resolution preferably matches one symbol or chip, if required by Layer 1 syn-
 20 chronisation in a soft handover procedure. Alternatively, the OFS and SOF can be stored as separate parameters.

The offsets can be updated in every measurement report. The mobile station can compare at any time its own timing reference with that of the base stations.

25 If the invention is used in a telecommunications system where the UTMS terminology is not applicable, the Mobile Station MS and Radio Network Controller RNC can be called, respectively, a first and a second end node. Correspondingly, the Base Stations BS can be called middle nodes. The first middle node (BS), via which the connection is established, is called a first mid-
 30 dle node. The other middle nodes, which will be added later, are called second middle nodes.

Brief description of the drawings

The invention will be described in more detail by means of preferred embodiments with reference to the appended drawing wherein:

35 Fig. 1A is a block diagram illustrating a cellular telecommunications network;

Fig 1B illustrates certain problems related to the invention;

Fig. 2A illustrates the concept of the invention; and

Fig. 2B is a signalling diagram illustrating the operation of a preferred embodiment of the invention.

5 Detailed description of the invention

Fig. 2A illustrates the concept of the invention. According to the invention, there is defined a connection-specific timing reference which is marked with reference number 20. The connection-specific timing reference 20 comprises a connection-specific frame number CFN and, preferably, an extension part called Hyper Frame Number HFN and a fractional offset part SOF.

Basically, the connection-specific frame number CFN is maintained like any other frame number in Fig. 1B. In other words, it is stepped (incremented) from zero in a modulo-p manner, wherein p is the period of the counter, such as 72. A similar frame number counter is maintained for all the nodes involved in the connection. The only difference between the counters is the offset between them. In Fig. 2A, the Mobile Station MS and the RNC synchronise their frame numbers MSFN, RNCFN to the connection-specific frame number CFN. In regard to the CFN, Base Station BS1 has a BS-specific offset BS1 of +2, because 2 must be added to BS1's frame number BS1FN for obtaining the connection-specific frame number CFN. (Whether such an offset is called positive or negative is only a matter of naming convention.) Correspondingly, Base Station BS2 has a BS-specific offset BS2 = -3. (In Fig. 2A, such small offsets have been chosen for clarity. In reality, the offsets can have any values between 0 and 71.) According to the invention, these BS-specific offsets must be determined and conveyed to the base station in question, whereby each base station can use the offset for compensating for the difference between its own timing reference (i.e. its frame numbering) and the connection-specific timing reference 20.

The vertical box labelled CFN indicates the frame numbers at various points in the network. At the time shown, the connection-specific timing reference 20 has a frame number CFN = 5, which is also true for the MS and the RNC. The BS-specific frame number of BS1 is 3 and that of BS2 is 8. Because the MS, being the master, is at liberty to choose any timing reference, and because the RNC has to synchronise its frame numbering to that of the MS, the MS and the RNC might as well synchronise their frame numbering schemes to that of BS1, which is the first base station involved in the connec-

tion. This means that the offset for BS1, i.e. OFS1, would be zero. (However, the benefit of a zero offset is slight, considering that it is probably easier for BS1 simply to add the offset rather than first check whether its offset is non-zero, and perform the addition if the offset is non-zero.)

5 The connection-specific timing reference 20 should also comprise an extension part, which is called a Hyper Frame Number HFN. It is stepped (incremented) each time the CFN completes a period, such as every 720 ms. The bit length of HFN should be rather high for two reasons. First, the HFN/CFN combination should be unambiguous during a connection. Second,
10 the HFN/CFN combination could be used as a ciphering/deciphering key. A suitable length for as a ciphering/deciphering key is approximately 32 bits, whereby the HFN is approximately 25 bits. With such a bit length, the HFN/CFN combination is unambiguous during a connection lasting up to a year.

15 Preferably, the connection-specific timing reference 20 also comprises a fractional offset part SOF which is used to compensate for the propagation delay T_{diff} shown in Fig. 1B.

 It should be noted that term 'frame number' can be somewhat misleading. The frame numbers are not used for counting actual user frames. Instead, the base stations use the frame numbers for numbering (marking)
20 uplink frames which are sent at a given point of time. They also use the frame numbers for determining the point of time when a downlink frame with a given frame number should be sent. For example, assuming that the CFN is incremented every 10 ms and it has a period of 72 steps (720 ms), an uplink frame
25 sent 1 second (1000 ms = 100×10 ms) after establishing the connection has a HFN of 1 and a CFN of 28 (= $100 \bmod 72$). Correspondingly, a downlink frame with a frame number of 28 must be sent $280 + n \times 720$ ms after establishing the connection. In order to maintain synchronisation, dummy frames can be sent between the RNC and the BS if there is no user data to be sent.

30 Fig. 2B is a signalling diagram illustrating the operation of the preferred embodiment of the invention. At step 200, the MS initiates a connection by sending a message called RRC_CONNECTION_REQUEST (RRC = Radio Resource Control protocol). This message contains the measurements of the base stations which the MS proposes to be included in its active set. The
35 measurements comprise the apparent power and the timing reference (a frame number offset) of each base station. At step 202, the connection request

is conveyed to the serving Radio Network Controller SRNC. At step 204, the SRNC sends a CHANNEL ACTIVATION command to BS1. This message includes the frame numbering offset value for BS1, i.e. OFS1. However, since BS1 is the first base station involved in the connection, its offset value OFS1 can be set to zero, because it is not necessary to synchronise the frame numbers of the base stations to an absolute timing reference. Instead, it is sufficient to synchronise the frame numbers of the various base stations with each other. (Next, BS1 sends an acknowledgement to SRNC, but it is irrelevant for understanding the invention.) At steps 206 - 208, a CONNECTION_REQUEST_ACK is sent via BS1 to the MS. Now, a connection has been established between the MS and the SRNC.

At step 210, the MS sends its first uplink frame. At step 211, BS1 calculates the Connection Frame Number CFN, based on the point of time when it receives the frame. BS1 also adds its frame numbering offset OFS1 to the CFN, but OFS1 was set to zero and the CFN does not change. At step 212, BS1 sends this frame to the SRNC. Steps 214 - 216 depict the corresponding steps for sending downlink data.

The MS must constantly monitor its neighbouring base stations. At step 220, it sends the SRNC a MEASUREMENT REPORT which (in this example) comprises measurement data for BS1 and BS2. The measurement data comprises measured power and the frame number offset of BS1 and BS2. At step 222, the SRNC decides that the MS receives BS2 strongly enough for adding BS2 into the MS's active set. At step 224, the SRNC sends BS2 a CHANNEL ACTIVATION command which comprises the frame numbering offset OFS2 for BS2. At step 226, the SRNC sends the MS an ACTIVE SET UPDATE message which commands the MS to include BS2 in its active set. (The ACTIVE SET UPDATE message is somewhat analogous to a handover message, but the current base station(s) is/are not necessarily abandoned.)

At step 230, the MS sends another uplink data frame. This time, the frame is relayed by to base stations, BS1 and BS2. At step 231, each base station determines its Base Station specific Frame Number BS1FN, BS2FN, based on the point of time when it receives the frame, and adds its own frame numbering offset OFSn to the BSnFN ($n=\{0, 1\}$). The sum of these OFSn and BSnFN is the Connection Frame Number CFN. The CFN has no base station specific index because it is the same at both/all base stations of the connection. At step 232, BS1 and BS2 send the uplink frame to the SRNC, the com-

binning unit of which can correctly combine the frames because the CFN is the same in both frames.

The actual combining step can be based on known macrodiversity techniques. Each frame may contain measurement results, such as a Bit Error Ratio BER or a Received Signal Strength Indication RSSI, and of similarly
 5 numbered frames, the combining unit can choose the one that has the best measurement result.

Steps 234 to 236 depict sending a downlink data to the mobile station MS. At step 234, the SRNC sends a downlink data frame having a connection frame number CFN to both/all base stations which are included in the
 10 mobile station's active set. At the SRNC, the CFN of downlink frames is determined on the basis of the point of time when the SRNC sends the downlink frame. At step 235, the base stations BS1 and BS2 use the CFN for determining the point of time when they must send the downlink frame to the mobile
 15 station. In Fig. 2B, this calculation of time is shown as a step of subtracting the base station specific offset OFSn from the connection frame number CFN, the result being the base-station specific frame number BSnFN, which has a well-defined relationship to the point of time when the frame must be sent to the MS. As has been described, the BSFN specifies the time within a 720-ms cycle. In addition to knowing the BSFN, the base station must maintain the Hy-
 20 per Frame Number HFN which specifies the most significant bits of the time. Next, at step 236, the base stations BS1 and BS2 send the downlink data frame to the mobile station MS. The different base station specific offsets OFSn compensate for the difference between the timing references of the
 25 base stations, and they send the frame at the correct point of time.

In Fig. 2B, uplink and downlink frames are sent individually. However, in practice, several frames (e.g. 4) are combined into one Transport Block Set TBS for improving ciphering security and immunity against transmission errors. Instead of including the CFN and/or timing adjustment information
 30 in each frame, it is sufficient to include such information in each TBS.

Layer 1 symbol synchronisation

In the current vision of UMTS, downlink Layer 1 data to be combined must be received with a timing difference which is less than one symbol period. In order to achieve such sub-symbol-period synchronisation, a procedure analogous to determining the frame number offsets can be applied. The
 35

MS measures the symbol offset SOF_n of candidate cells/base stations. The SOF is measured as the difference between the MS-specific required frame timing and the BS's downlink perch (broadcast) channel frame timing, and it is included in the measurement report. After deciding to add a new base station

5 to the MS's active set, that BS's SOF_n is conveyed to the BS in question in the channel activation message.

Due to frequency drifts, it may be necessary to update the SOF during a connection. In this case, the MS may measure/recalculate the SOF and report it in the measurement report. The expected rate for the SOF recal-

10 culation is in the order of once per 10 minutes.

Instead of using a separate frame number OFS and a symbol offset SOF, these two offsets can be combined to a float number, of which the integer part specifies the OFS and the decimal part specifies the SOF.

SRNC relocation

15 During a connection, the RNC serving the MS may change. In Fig. 1A, the broken arrow depicts the MS's movement to a cell served by BS4 which is under control of RNC2. Such a situation requires SRNC relocation. In a SRNC relocation process, the frame numbering system (i.e. the MSFN) must be preserved. The CFN part can be maintained in the new SRNC because of

20 uplink FCL frames. However, the HFN should be transferred to the new SRNC over the Iur interface. The HFN can be transferred in an RNSAP SRNC relocation procedure. If the maximum transfer delay of the two messages via the core network exceeds the CFN period of 720 ms (this can happen especially if MAP-E is involved), some additional measures must be taken. For example,

25 assuming that the old and new RNC are synchronised to a common time reference, it is sufficient to inform the new RNC about the point of time when the HFN was initialised.

Common channel state

A MS may enter Common CHannel state (CCH) during a connection, when little data needs to be transferred between the MS and the SRNC.

30 In common channel state, the Random Access Channel RACH and Forward Access Channel FACH channels are shared between several users. In this case, the use of absolute frame number references is necessary only for ciphering purposes, because macrodiversity is not used. In other words, frames

35 are sent between the MS and the RNC via only one base station, and the MS

can be allowed to use the frame numbering of that base station. If the BS is changed due to handover, the CFN should be changed to that of the new BS.

On the RACH, the MSFN is used for ciphering data, although some RACH signalling messages (or at least parts of them) are sent unciphered. On the FACH, the MSFN is used for scheduling and retransmission in the SRNC. The MAC layer knows the BSFN and/or the CFN and uses the MSFN for ciphering data on the FACH.

If the RNC is using a timing reference which was established before entering the CCH state, it may not know exactly the frame number which corresponds to the point of time when the BS will send a downlink frame to the MS. This makes frame-number-based ciphering/deciphering virtually impossible because the MS may receive the frame at a point of time which corresponds to a frame number different from the frame number which the RNC used for ciphering. Accordingly, it is proposed that at least in a case when the BS cannot send a frame at a point of time which corresponds to a frame number indicated by the RNC, the RNC sends the frame to the MS and provides it with an appropriate correction field. For instance, if the CFN indicated by the RNC is 36 and the BS sends the frame at a point of time which corresponds to a CFN of 38, the BS should indicate to the MS that the frame was delayed by an amount of time which corresponds to two frame numbers.

Such a correction field could be limited to non-negative values. This means that if the frame number is not what the RNC indicated, the frame is delayed. If the frame number indicated by the RNC is too high, the BS could correct the problem by delaying the frame.

Alternatively, sending the correction field could be avoided if the ciphering/deciphering algorithm is such that the MS can figure out whether or not a frame can be correctly deciphered (e.g. by providing a meaningless result if not). In this case the MS may, upon encountering an incorrect deciphering result, decipher the frame using the key which corresponds to the few previous frames.

Changes to UMTS proposals

If the invention is applied in a cellular telecommunications network, such as UMTS, some changes to current standard proposals will be needed. The RRC protocol should be extended for conveying the base station-specific offsets (OFS, and preferably, SOF for L1 timing) in the MEASUREMENT REPORT for the candidate cells. For some base stations these measurement values

change very slowly or, for practical purposes, they do not change at all, and thus some overhead can be eliminated by sending the offsets only as necessary.

The FCL protocol should include the CFN in every uplink and downlink frame. For maintaining synchronisation, uplink frames should be sent regularly, even if there is no data to be sent (DTX). Dummy frames can be used for initial synchronisation. One or more time adjustment bits can be included in the FCL header. The format of the header can be bearer-specific.

The BSAP protocol should include the OFS/SOF in the CHANNEL ACTIVATION message and in the CHANNEL MODIFICATION message, if used. A new message/procedure, TRANSMISSION FAILURE/ERROR INDICATION should be defined for indicating that a base station has received a frame completely out of the time slot allocated for the frame.

The RNSAP protocol should include the OFS/SOF in the BRANCH ADDITION and BRANCH RECONFIGURATION messages. Similar to the BSAP protocol, a new message/procedure, TRANSMISSION FAILURE/ERROR INDICATION should be defined.

The RANAP protocol should include the HFN (or the point of time when the HFN was initialised) in SRNC RELOCATION and SRNC RELOCATION REQUEST messages.

The Radio Network Controller RNC should include on the MAC layer a Hyper Frame Number HFN counter for each mobile station. Actually, an MS-specific counter is only needed as a logical concept. In practice, it is not necessary to establish a separate counter for each mobile station. Alternatively, for each mobile station, the RNC could store the point of time when the connection was established, and when the HFN number is needed, its initial value is retrieved and added to the current duration of connection (in units of 720 ms cycles). The HFN can be used as an input to the ciphering/deciphering algorithm. Preferably, the RNC should also store the SOF/Tdiff (see Figs. 1B and 2A) for each mobile station and modify it according to the timing advance bits in FCL uplink frames. This information is used for setting the transmission time of the FCL downlink frames and for setting a switching time for operations involving L1/L2 reconfiguration.

The Base Stations BS should store, for each mobile station, the BS-specific frame numbering offset OFS (and a separate symbol offset SOF if it is not included in the OFS). The BS should include the $CFN = BSFN + OFS$

in every uplink data frame and transmit the downlink data frames at the point of time which corresponds to $BSFN = CFN - OFS$. (In these additions and subtractions, the SOF is assumed to be included in the OFS.) Moreover, the base stations should set the timing adjustment bit(s) in uplink FCL frames.

- 5 The Mobile Station MS should initialise a MS-specific frame number MSFN and increment it every 10 ms. It should also measure the OFS and SOF of base stations within range (in addition to the prior art measurements), and report these offset parameters in its measurement reports.

- 10 For illustrating the invention, and for demonstrating its industrial applicability, the invention has been described in connection with a 3rd generation mobile telecommunications system, such as UMTS. However, the invention is applicable in other types of communications systems and, consequently, it is not limited to the embodiments described above.

Glossary (some acronyms are not official):

- 15 BSn: Base Station number n
 BSAP: BS Application Part protocol
 BSnFN Frame Number used by Base Station number n
 CCH: Common CHannel (state)
 CFN: Connection Frame Number
 20 DTX: Discontinuous Transmission
 FACH: Forward Access Channel
 FCL: Frame Control Layer (a frame transmission protocol)
 HFN: Hyper Frame Number, extension of CFN
 MAC: Medium Access Control
 25 MS: Mobile Station, also called User Equipment (UE)
 OFSn: Frame number offset of BS number n
 RACH: Random Access Channel
 RANAP: RAN (Radio Access Network) Application Part
 RNC: Radio Network Controller
 30 RNSAP: Radio Network System Application Part (signalling protocol between 2 RNCs)
 SOFn: Symbol Offset, can be presented as fractional part of OFSn
 SRNC: Serving RNC
 TBS: Transport Block Set
 UMTS: Universal Mobile Telecommunications System

Claims

1. A method for synchronising transmission of frames in a telecommunications network comprising a first end node (MS), a second end node (SRNC), at least one middle node (BS1, BS2) via which a connection is established between said end nodes (MS, SRNC), wherein said first end node (MS) and said at least one middle node (BS1, BS2) have a corresponding timing reference (MSFN, BS1FN, BS2FN);

characterized in that the method comprises the steps of:
 establishing a connection-specific timing reference (CFN) which is common to all nodes (MS, BS1, BS2, RNC) involved in said connection;
 determining, for at least one middle node (BS1, BS2) an offset (OFS, SOF) which is related to the difference between the timing reference of the middle node in question and said connection-specific timing reference (CFN); and
 using said information about said offset to compensate for said difference between said timing references.

2. A method according to claim 1, characterized in that said offset is used by the at least one middle node (BS1), for synchronising its timing reference to that of the second end node (RNC).

3. A method according to claim 1 or 2, characterized in that the network comprises a first middle node (BS1) via which the connection is established and at least one second middle node (BS2, BS3); and that said offset is used by at least each second middle node (BS2, BS3).

4. A method according to any one of the preceding claims, characterized in that the end nodes (MS, SRNC) synchronise their timing references based on the time when a predetermined message (200, 202) is sent between them.

5. A method according to claim 4, characterized in that in that the end nodes (MS, SRNC) synchronise their timing references based on the time when the connection between them is established.

6. A method according to any one of the preceding claims, characterized in that the connection-specific timing reference comprises, at said end nodes (MS, RNC):

a connection-specific frame number (CFN), the value of which is stepped at predetermined intervals and which has a finite length such that the connection-specific frame number (CFN) has a period which is substantially shorter than the duration of a typical connection; and

- 5 a frame number extension (HFN) which is stepped when the connection-specific frame number completes one period.

7. A method according to claim 6, characterized in that the end nodes use the connection-specific frame number (CFN) and the frame number extension (HFN) for ciphering and deciphering the frames.

- 10 8. A method according to any one of the preceding claims, characterized in that each middle node (BS) uses the connection-specific timing reference for determining the time of transmission towards the first end node (MS) and for determining a frame number for frames towards the second end node (SRNC).

- 15 9. A method according to claim 8, characterized in that the offset for the middle node in question also comprises a fractional offset part (SOF) which approximately corresponds to the propagation delay of a frame between said end nodes (MS, SRNC).

- 20 10. A method according to any one of the preceding claims, characterized in that the first end node (MS) obtains measurement results of the middle nodes (BS) and sends the measurement results to the second end node (SRNC); and the second end node (SRNC) uses the measurement results for determining said offset for the middle node in question.

- 25 11. A method according to any one of the preceding claims, characterized in that end nodes (MS, SRNC) synchronise their timing references to the timing reference of one of said at least one middle node (BS1, BS2) involved in the connection.

- 30 12. A method according to claim 11, characterized in that end nodes (MS, SRNC) synchronise their timing references to the timing reference of the first middle node (BS1) involved in the connection.

13. A method according to any one of the preceding claims, characterized in that the first end node is a mobile station (MS), the

middle nodes are base stations (BS1, BS2), and the second end node is a radio network controller (RNC) controlling said base stations (BS1, BS2).

14. A first end node (MS) for forming a connection to a second end node (SRNC) via at least one middle node (BS1, BS2,...) in a telecommunications network, wherein said first end node (MS) and each middle node (BS1, BS2) have a corresponding timing reference (MSFN, BS1FN, BS2FN); characterized in that the first end node (MS) is adapted to co-operate with said second end node (SRNC), for:

establishing a connection-specific timing reference (CFN) which is common to all nodes involved in said connection, and

determining, at least for one middle node (BS1, BS2), an offset (OFS, SOF) which is related to the difference between the timing reference of the middle node in question and the connection-specific timing reference (CFN).

15. A second end node (SRNC) for forming a connection to a first end node (MS) via at least one middle node (BS1, BS2,...) in a telecommunications network, wherein said first end node (MS) and each middle node (BS1, BS2) have a corresponding timing reference (MSFN, BS1FN, BS2FN);

characterized in that the second end node (SRNC) is adapted to:

co-operate with said first end node (MS), for establishing a connection-specific timing reference (CFN) which is common to all nodes involved in said connection, and for determining, at least for one middle node (BS1, BS2), an offset (OFS, SOF) which is related to the difference between the timing reference of the middle node in question and the connection-specific timing reference (CFN); and

use said information about said offset to compensate for said difference between said timing references.

16. A second end node according to claim 15, characterized in that the second end node (SRNC) is adapted to convey said information about said offset to the middle node in question.

17. A middle node (BS1, BS2) for forming a connection between a first end node (MS) and a second end node (SRNC) in a telecommunications network, wherein data is sent between said end nodes (MS, SRNC) in frames

at least some of which are sent via several middle nodes (BS1, BS2); and wherein said first end node (MS) and each middle node (BS1, BS2) have a corresponding timing reference (MSFN, BS1FN, BS2FN);

characterized in that the middle node is adapted to synchronise to a connection-specific timing reference (CFN) by:

receiving an offset (OFS, SOF) which is related to the difference between its own timing reference and the connection-specific timing reference (CFN); and

using said offset to compensate for said difference between said timing references.

(57) Abstract

A mechanism for synchronising transmission of frames in a telecommunications network comprising a mobile station (MS), a radio network controller (SRNC), at least one base station (BS1, BS2). The mobile station (MS) and each base station (BS1, BS2) have a corresponding timing reference (MSFN, BS1FN, BS2FN). The mechanism comprises or performs the steps of 1) establishing a connection-specific timing reference (CFN) which is common to all nodes (MS, BS1, BS2, RNC) involved in the connection; 2) determining, for the base stations (BS1, BS2) an offset (OFS) between the timing reference of the base station in question and the CFN; and 3) using the offset (OFS) in the base stations (BS1, BS2), to compensate for the difference between the timing references.

(Fig. 2B)

Fig. 1A

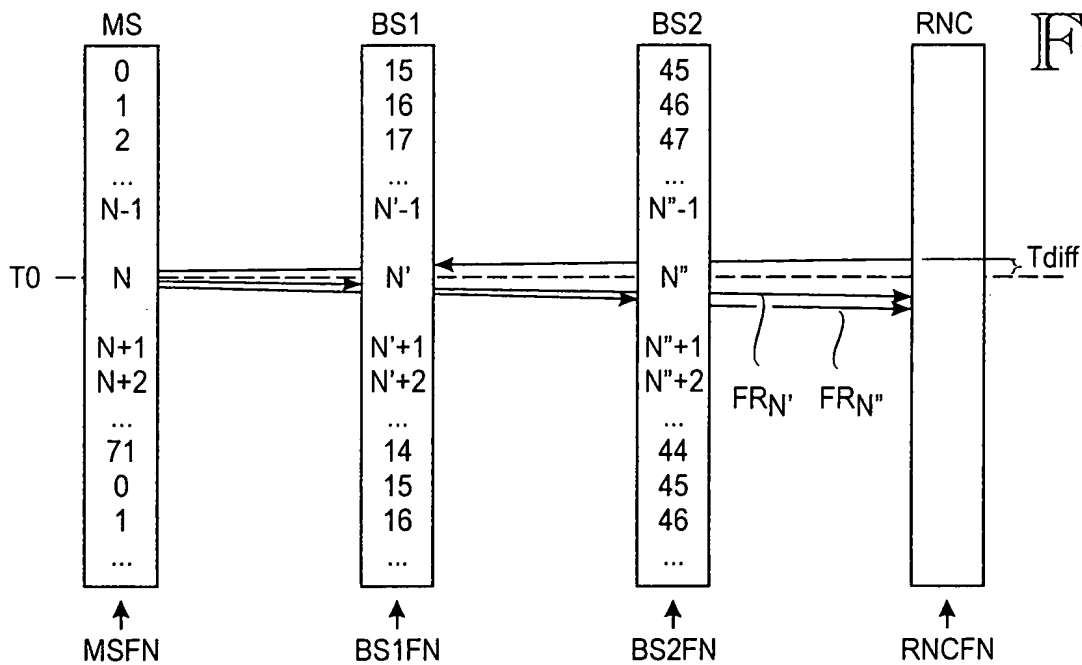
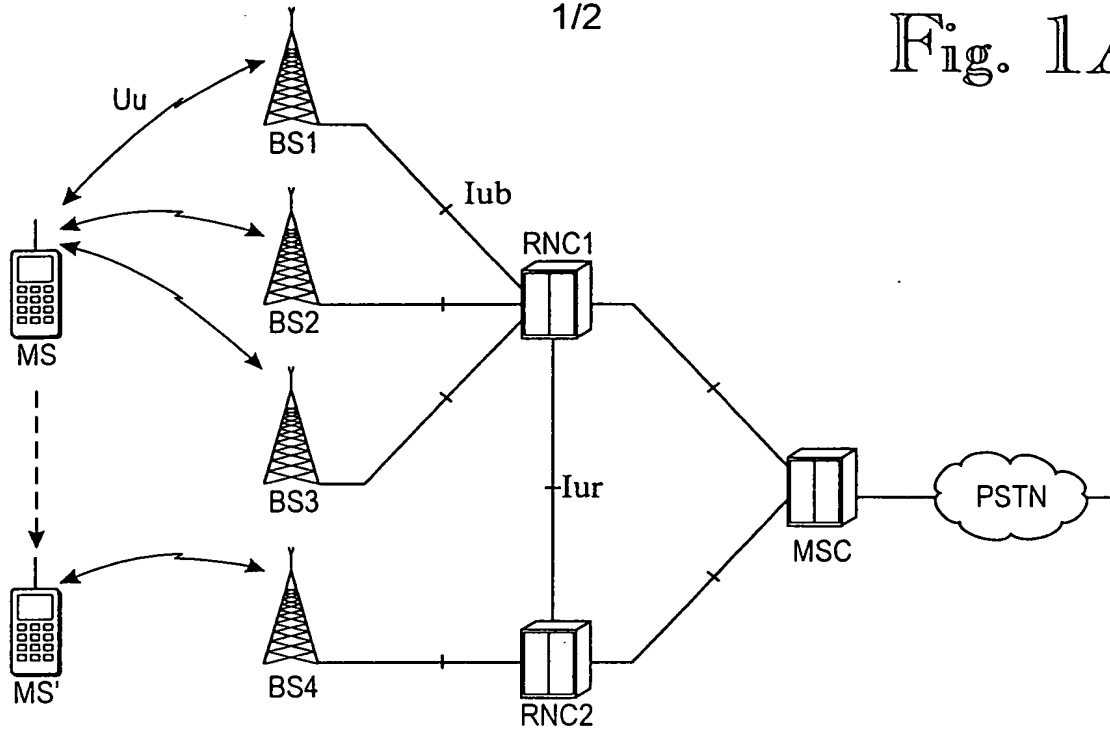


Fig. 1B

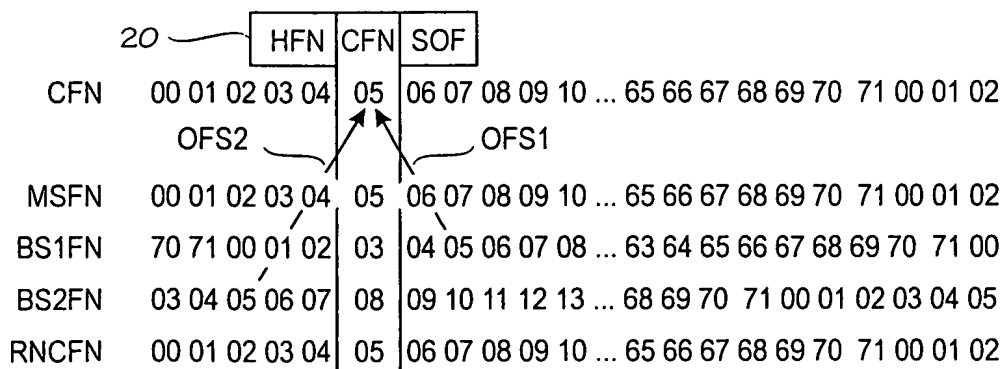


Fig. 2A

Fig. 2B

